


newline
Connect. Create. Collaborate.

TRUTOUCH i65

REVOLUTIONIZING
THE EDUCATION SECTOR
IN INDIA

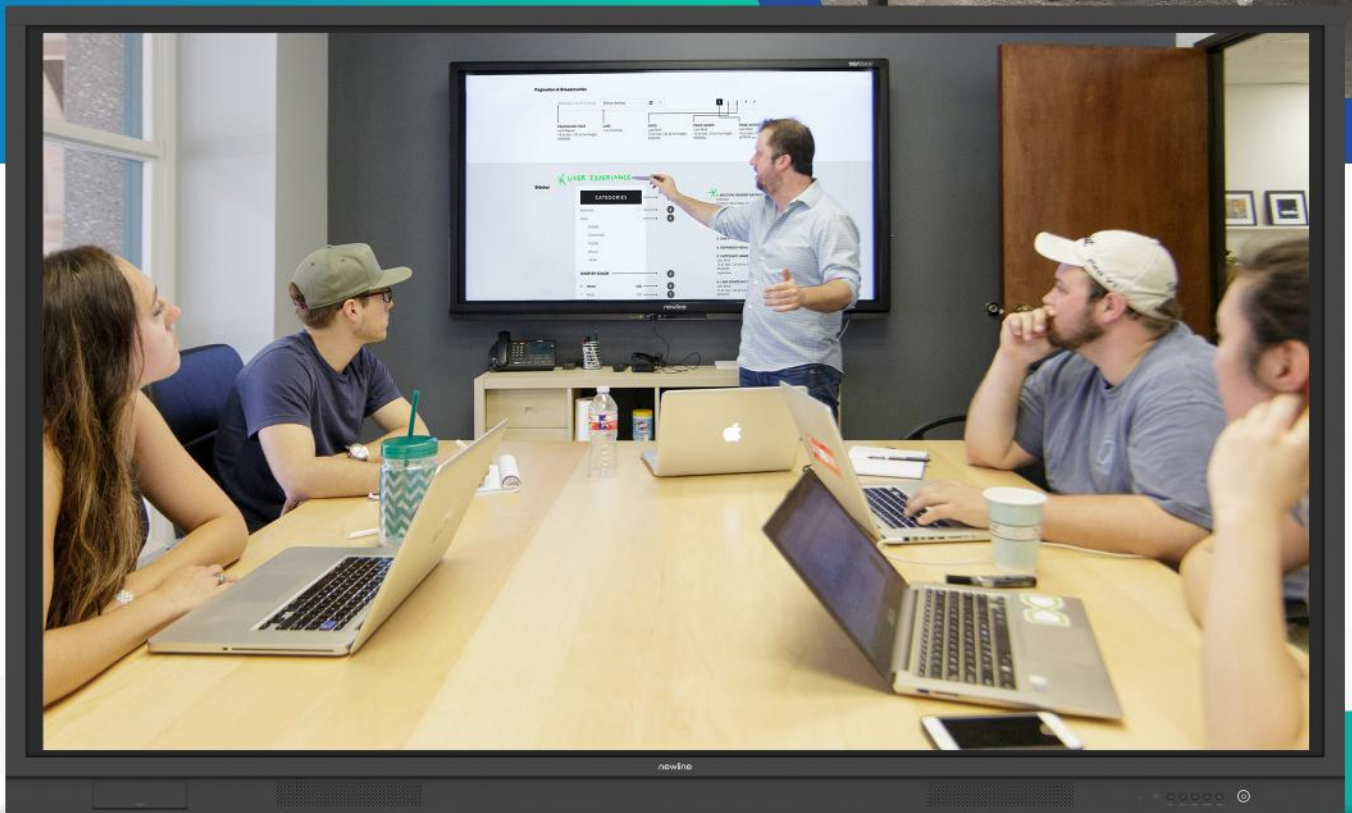

PRODUCT SPECIFICATION

DISPLAY	TT-6519I
PANEL SIZE	65"
TYPE/TECH	LED BACKLIGHT
DISPLAY AREA (MM)	1428.5*803.5MM
ASPECT RATIO	16:09
NATIVE RESOLUTION	3840*2160 (4K)
COLORS	1.07 BILLIONB(10 BIT)
BRIGHTNESS	>450NITS
CONTRAST RATIO	15000:1
RESPONSE TIME	<4MS
REFRESH RATE	120 HZ
VIEWING ANGLES	H = 178, V = 178 TYP.
BACKLIGHT LIFE	50,000 HOURS TYP.
GLASS THICKNESS	4MM
GLASS HARDNESS	9H (PENCIL) , 7(MOHS)
SURFACE TREATMENT	ANTIGLARE (7H)
ORIENTATION	LANDSCAPE
OPERATING SYSTEM	
OPERATING SYSTEM	NON- ANDRIOD
TOUCH	
TYPE/ TECH	INFRA RED
TOUCH RESOLUTION	32767 X 32767
TOUCH POINT	20 POINT MULTI TOUCH
OS SUPPORT	WINDOWS / LINUX / ANDROID / MAC
INPUT	
HDMI	X3 (2.0*2 IN REAR SIDE. 1.4*1 IN FRONT)
TOUCH USB	X2 (TYPE B)
RGB / VGA	X1
AUDIO	X1 PC AUDIO(3.5 MM)
YPBPR	X1
MIC(MICROPHONE)	X1 (FRONT SIDE)
AV IN	X1 (CVBS+L+R)
OPS	INTEL STANDARD OPS SLOT SUPPORT 4K@60HZ
OUTPUT	
AUDIO	X1 EARPHONE OUT
AV OUT	YES
CONTROL	
RS232	X1
USB	
TYPE A	X2 (3.0) FRONT
TYPE A	X1 (2.0) REAR (FW UPGRADE)
SPEAKERS	
	15WX2

COMPATIBILITY	
CVBS	480I,
HDMI	480I, 480P,720P,1080I,1080P
CONTROLS	
PHYSICAL- TOP OSD	INPUT: MANUAL , SOURCE, MUTE ,VOLUME -, VOLUME +
	PC, EMBD PLAYER, AV, VGA, HDMI1, HDMI2, HDMI3
	LIGHT:1~10
	VOLUME:0~100
	VGA: H POSITION, V POSITION, PHASE, CLOCK, ZOOM, AUTO ADJUST, WRITING MODE
FRONT CONNECTORS	PICTURE: BRIGHTNESS, CONTRAST, HUE, SHARPNESS, COLOR TEMP, ZOOM, WRITING MODE
	2 X USB 3.0 FOR OPS, , 1 X HDMI, 1 X TOUCH, 1 X MIC
MULTIMEDIA	IMAGE: JPEG, BMP, PNG VIDEO: MPEG2, MPEG4, H264, HEVC(H.265) AUDIO: WMA, MP3, M4A, (AAC)
POWER	
VOLTAGE	AC 100-240V, 50/60HZ
CONSUMPTION	220 (TYP) < 0.5 W ("STANDBY MODE")
VESA	
VESA PATTERN	600*400
OPERATING CONDITIONS	
TEMPERATURE (° C)	0°C TO 40°C
HUMIDITY	20% ~ 80% NON-CONDENSING
DIMENSIONS	W X H X D(
PHYSICAL (INCH / MM)	1670X221X1056
WEIGHT	
NET (LB / KG)	45KG+/- 2KG
GROSS (LB / KG)	65KG +/- 2KG
PACKAGE CONTENTS	
	1. DISPLAY 2. POWER CABLE 3. USB CABLE 4. REMOTE CONTROL WITH BATTERIES 5. STYLUS (X1) 6. USER GUIDE
SYSTEM	
CHIPSET	MSD3458HB
CPU	MIPS ADVANCED MULTI-CORE CPU
RAM	2GBIT DDR3 MCP
ROM	64M BIT NORFLASH
CERTIFICATES	
REGULATIONS	BIS
OTHERS	
NEWLINE CAST WINDOWS (OPTIONAL)	EASILY SHARE YOUR SCREEN FROM ANY DEVICE Present and share content onto your Newline display wirelessly from any device with a single click. It works with all modern laptops, tablets, phones and support for your browser. Enjoy two-way collaboration as you control and annotatefrom the display or from your own device.
NEWLINE BROADCAST WINDOWS (OPTIONAL)	SHARE CONTENT TO AUDIENCES OF ANY SIZE HASSLE-FREE BROADCASTING Share your screen in real-time from your Newline display to any participant connected. Easily invite up to 200 participants to connect their own device from the meeting room, classroom, lecture theatre or any other place in the world with a network connection



HiteVision

CHENNAI

Room No. 202, 203, 211
No.37, Workafella, TTK Road, Alwarpet,
Chennai-600018, Tamil Nadu

GUJARAT

104, 1st Floor, Shilp Arista, Opposite
Stellar, Sindhu Bhavan Road, Thaltej,
Ahmedabad 380015, Gujarat

DELHI

Unit No. A-717, 7th Floor,
DLF Tower A, Jasola District Centre,
New Delhi- 110025

KOLKATA

RAIKVA Tower 3A, Ram Mohan
Mullick Garden Lane, 3rd Floor, Suit No - 309
Kolkata, West Bengal 700010

MUMBAI

1st Floor,B-107, Kanakia Wall Street,
Chakala, Andheri Kurla Road,
Andheri East Mumbai-400059, Maharashtra.



1-800-419-0309 | www.newlineinteractive.in