


newline
Connect. Create. Collaborate.



TRU TOUCH i85

REVOLUTIONIZING
THE EDUCATION SECTOR
IN INDIA

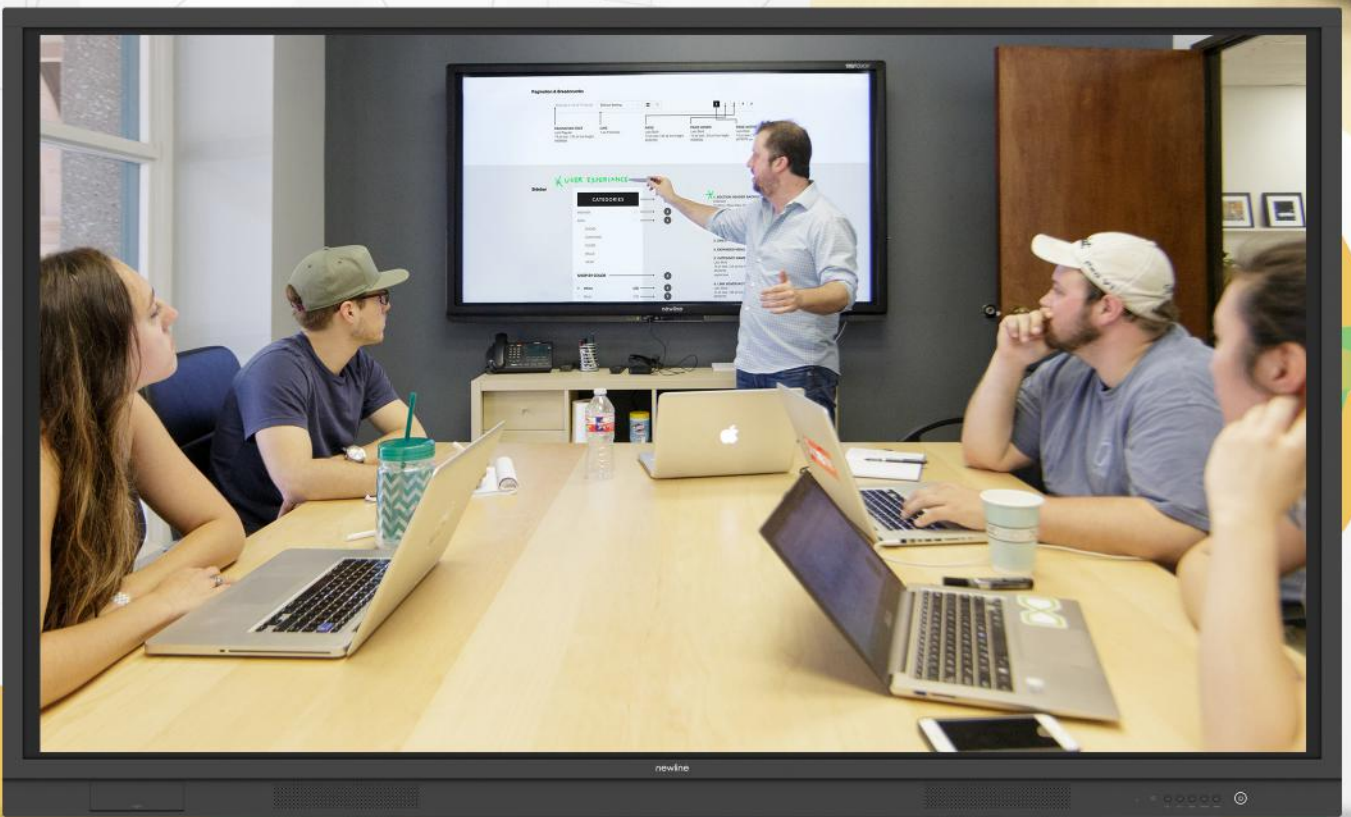

PRODUCT SPECIFICATION

DISPLAY	TT-8519IS	COMPATIBILITY	
PANEL SIZE	85"	CVBS	480I,
TYPE/TECH	LED BACKLIGHT	HDMI	480I, 480P,720P,1080I,1080P
DISPLAY AREA (MM)	1872MM*1053MM	CONTROLS	
ASPECT RATIO	16:09	INPUT: MANUAL , SOURCE, MUTE ,VOLUME -, VOLUME +	
NATIVE RESOLUTION	3840*2160 (4K)	PC, EMBD PLAYER, AV, VGA, HDMI1, HDMI2, HDMI3	
COLORS	1.07 BILLIONB(10 BIT)	LIGHT:1~10	
BRIGHTNESS	>450NITS	VOLUME:0~100	
CONTRAST RATIO	15000:1	VGA: H POSITION, V POSITION, PHASE, CLOCK, ZOOM, AUTO ADJUST, WRITING MODE	
RESPONSE TIME	<4MS	PICTURE: BRIGHTNESS, CONTRAST, HUE, SHARPNESS, COLOR TEMP, ZOOM, WRITING MODE	
REFRESH RATE	120 HZ	PHYSICAL- TOP OSD	
VIEWING ANGLES	H = 178, V = 178 TYP.	FRONT CONNECTORS	2 X USB 3.0 FOR OPS, , 1 X HDMI, 1 X TOUCH, 1 X MIC
BACKLIGHT LIFE	50,000 HOURS TYP.	MULTIMEDIA	IMAGE: JPEG, BMP, PNG VIDEO: MPEG2, MPEG4, H264, HEVC(H.265) AUDIO: WMA, MP3, M4A, (AAC)
GLASS THICKNESS	4MM	POWER	
GLASS HARDNESS	9H (PENCIL) , 7(MOHS)	VOLTAGE	AC 100-240V, 50/60HZ
SURFACE TREATMENT	ANTI GLARE (7H)	CONSUMPTION	Maximum ≤450W < 0.5 W ("STANDBY MODE")
ORIENTATION	LANDSCAPE	VESA	
OPERATING SYSTEM		VESA PATTERN	800*400
OPERATING SYSTEM	NON- ANDRIOD	OPERATING CONDITIONS	
TOUCH		TEMPERATURE (° C)	0°C TO 40°C
TYPE/ TECH	INFRA RED	HUMIDITY	20% ~ 80% NON-CONDENSING
TOUCH RESOLUTION	32767 X 32767	DIMENSIONS	
TOUCH POINT	20 POINT MULTI TOUCH)W X H X D(
OS SUPPORT	WINDOWS / LINUX / ANDROID / MAC	PHYSICAL (INCH / MM)	2119X1309X275
INPUT		WEIGHT	
HDMI	X3 (2.0*2 IN REAR SIDE. 1.4*1 IN FRONT)	NET (LB / KG)	69KG
TOUCH USB	X2 (TYPE B)	GROSS (LB / KG)	86KG
RGB / VGA	X1	PACKAGE CONTENTS	
AUDIO	X1 PC AUDIO(3.5 MM)	1. DISPLAY 2. POWER CABLE 3. USB CABLE 4. REMOTE CONTROL WITH BATTERIES 5. STYLUS (X1) 6. USER GUIDE	
YPBPR	X1	SYSTEM	
MIC(MICROPHONE)	X1 (FRONT SIDE)	CHIPSET	MSD3458HB
AV IN	X1 (CVBS+L+R)	CPU	MIPS ADVANCED MULTI-CORE CPU
OPS	INTEL STANDARD OPS SLOT SUPPORT 4K@60HZ	RAM	2GBIT DDR3 MCP
OUTPUT		ROM	64M BIT NORFLASH
AUDIO	X1 EARPHONE OUT	CERTIFICATES	
AV OUT	YES	REGULATIONS	BIS
CONTROL		OTHERS	
RS232	X1	NEWLINE CAST WINDOWS (OPTIONAL)	EASILY SHARE YOUR SCREEN FROM ANY DEVICE Present and share content onto your Newline display wirelessly from any device with a single click. It works with all modern laptops, tablets, phones and support for your browser. Enjoy two-way collaboration as you control and annotate from the display or from your own device.
USB		NEWLINE BROADCAST WINDOWS (OPTIONAL)	SHARE CONTENT TO AUDIENCES OF ANY SIZE HASSLE-FREE BROADCASTING Share your screen in real-time from your Newline display to any participant connected. Easily invite up to 200 participants to connect their own device from the meeting room, classroom, lecture theatre or any other place in the world with a network connection
TYPE A	X2 (3.0) FRONT		
TYPE A	X1 (2.0) REAR (FW UPGRADE)		
SPEAKERS			
	15WX2		



CHENNAI
Room No. 202, 203, 211
No.37, Workafella, TTK Road, Alwarpet,
Chennai-600018, Tamil Nadu

GUJARAT
104, 1st Floor, Shilp Arista, Opposite
Stellar, Sindhu Bhavan Road, Thaltej,
Ahmedabad 380015, Gujarat

DELHI
Unit No. A-717, 7th Floor,
DLF Tower A, Jasola District Centre,
New Delhi- 110025

KOLKATA
RAIKVA Tower 3A, Ram Mohan
Mullick Garden Lane, 3rd Floor, Suit No - 309
Kolkata, West Bengal 700010



MUMBAI
1st Floor,B-107, Kanakia Wall Street,
Chakala, Andheri Kurla Road,
Andheri East Mumbai-400059, Maharashtra.



1-800-419-0309 | www.newlineinteractive.in